


4-9 CB17

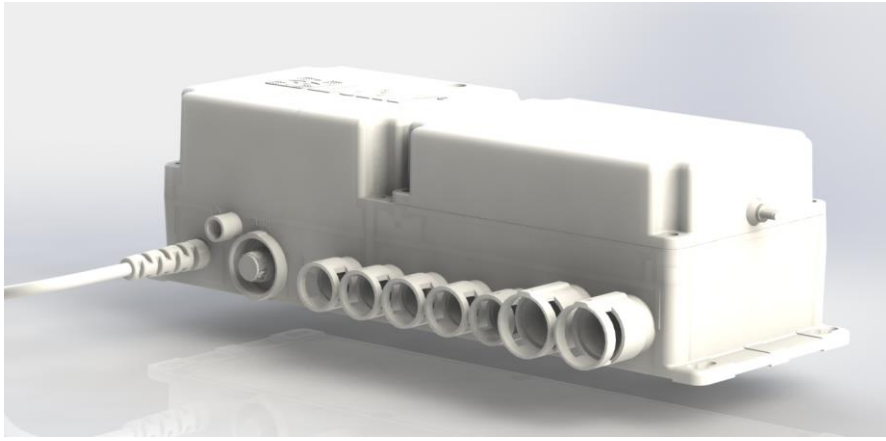

CB17 is a slender shape control box, it is widely used in hospital beds and care beds, as well as in multiple function beauty equipment.

Features :

- Max. for 4 actuators. Actuator type: LA29, LA31, LA32, LA33 , LA34 , LA35, LA38, LA39 (with Jack Plug)
- Mains voltage: 220-240/ 100-120V AC; 50-60Hz
- Dual output voltage (Low load: Low voltage; High load: High voltage)
- Compact high power toroidal transformer ensures low power consumption and low electromagnetic emission
- All channels have electronic overload protection (EOP) device
- DIN socket for handset HB3X, HB5X, HB7X , HB8X, ACP and FS
- Fixed power cable
- Duty cycle: Max. 10% or 6 min. continuous use followed by 1 hour not in use
- Ambient temperature: +5°C to +40°C
- Protection class: IP54
- Color: Gray-White (Black Min. Order 500pcs)
- Built-in Battery case
- Stop working when battery in low Voltage
- Additional wire clasp make the actuator combine with control box more securely
- Exchangeable fuse holder

Options :

- Can choose additional 2 pcs BA1600 rechargeable batteries installed in battery case
- Class 1: earth connection
- Protection class: IP66
- Built-in T-cable device needed for operating two handsets simultaneously

CB17 Ordering Example :

CB17. 3 E - 2UL + 22 B

BATTERY (extra costs)

A: WITH BATTERY CHARGER

N: WITHOUT BATTERY CHARGER

B: WITH BATTERY CHARGER) ※

T: WITHOUT BATTERY CHARGER ※

MAINS VOLTAGE (Input Mains Voltage)

10 = 100V★

12 = 120V

22 = 220V

COLOR

—: Black (Min Order 500pcs) ★

+: Gray-white

POWER CABLES

2EU: 2P, STRAIGHT, EU CABLE

2JP: 2P, STRAIGHT, JP CABLE ★

2UL: 2P, STRAIGHT, UL CABLE☆

2UK: 2P, STRAIGHT, UK CABLE

2AUS: 2P, STRAIGHT, AUS CABLE★

3EU: 3P, STRAIGHT, EU CABLE☆

3UL: 3P, STRAIGHT, UL CABLE☆

3IN: 3P, STRAIGHT, IN CABLE☆

3UK: 3P, STRAIGHT, UK CABLE★

3AUS: 3P, STRAIGHT, AUS CABLE★

EARTH CONNECTION E

NO. OF CHANNELS

1: 1 CHANNEL

2: 2 CHANNELS

3: 3 CHANNELS

4: 4 CHANNELS ☆

CONTROL BOX TYPE CB17-STANDARD





(Actuator sockets on CB17 are for JACK Plug)

The 「★」 signal is for special specification.

The 「※」 signal is only for China products .

The 「☆」 signal merchandise in China belongs to special specification.

Dimensions :

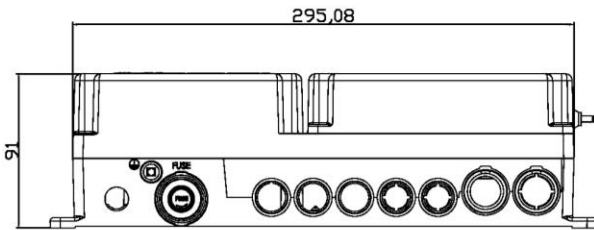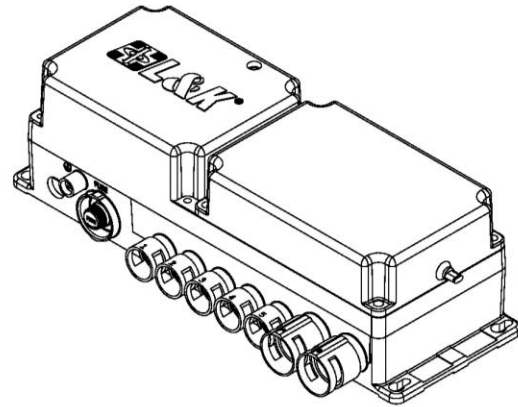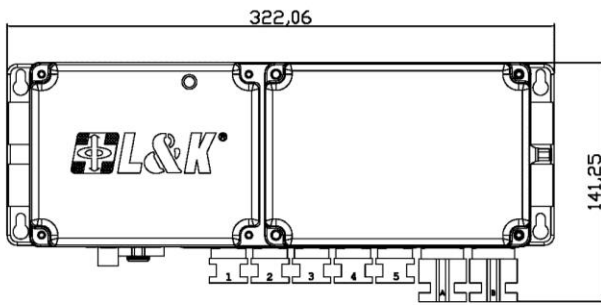

Notice :

- ◆ CB17 can not work with LA37.
- ◆ Built-in T Cable device needed when operating two handsets simultaneously or one handset and one ACP simultaneously.